

CRC[®]-25W Dose Calibrator/Well Counter

The new standard in providing dose calibration, wipe tests and lab tests all in one unit!

As a combination of the popular CRC[®]-25R Dose Calibrator and the CAPRAC[®]-R Well Counter, the CRC[®]-25W dose calibrator provides advanced features with the speed and accuracy you need to measure activity and prepare doses. Its ion chamber is one of Capintec's time-tested, high pressure well designs capable of measuring a dose as high as 6 Ci (250 GBq) of Tc 99m with high accuracy. The CRC[®]-25W now features a helpful chamber plug-and-play capability.

For wipe testing, the CRC[®]-25W allows the user to define specific counting procedures (protocols) with trigger levels for work, patient, unrestricted areas and sealed source leak tests. The CRC[®]-25W also performs counting functions for wipe tests in as little as 6 seconds at activities as low as 1 nCi. Low activities are measured with a drilled well high sensitivity Sodium Iodide (NaI) detector.

The 6-channel pulse-height analyzer also provides the user with pulse amplitude discrimination, which can be used to help with radionuclide isotope identification.

The chamber and counter of the CRC[®]-25W are combined in a menu driven, push-button interface that is easy to learn and use. Perform nuclide and Daily Test selections hundreds of feet away from the CRC[®]-25W read out unit with our new remote capabilities.

Count on Capintec not only for excellence in energy measurement, but for our unsurpassed customer service, training and support!

25W Features

- USB and RS232 ports
- Software upgrade via SD flash card
- USB printer capability
- Chamber plug-and-play capability
- Intelligent, interactive remote
- Both remote and chamber can be placed 100 feet from the readout unit
- Selection of Nuclide and Daily Test can be done with the remote
- Built-in dose calibration, quality control and self diagnostics
- Well counter for wipe tests and laboratory tests
- User-definable protocols for wipe testing
- Large character, high visibility display with automatic backlighting
- Over 80 nuclides in memory
- Automatic energy calibration, zeroing and background subtraction



- Hard copy records of data available from optional dot matrix printer
- Vial and syringe labels on adhesive-backed strips available from optional mini-printer
- 6-channel pulse height analyzer with spectral pulse amplitude discrimination for preliminary isotope identification
- Compatible with nuclear medicine information management systems via USB or Rs-232 ports
- Calculation of printable dose table
- Inventory control- maintains inventory of unit dose and kits
- Automated linearity and geometry testing
- Radiochromatography QC package



25W Specifications

- Well Detector: Sodium Iodide (NaI) drilled-well crystal detector; Energy Discrimination: Fixed range MCA, channel windows are 15-100, 100-200, 200-400, 400-660, 660-800 and >800 keV; Warning Trigger Levels: User-definable; Tests: Daily test by standard sources (Cs-137 or Ba-133), data and program memory configuration

continued on next page

This product is available through:

JRT Associates 800-221-0111

- Ionization Chamber: Thin wall, deep well, high pressure; Measurement: Auto ranging; Activity Range: Up to 6 Ci (250 GBq); Resolution: .001 mBq (.01 μ Ci); Response Time: Within 2 sec., for low activity sample, 4 to 16 sec. (user selectable); Tests: Daily tests include Auto Zero, Background Adjustment, Voltage Test, Data Check, Accuracy and Constancy
- Display Screen: Dot matrix liquid crystal display; Bq/Ci Reading: User selectable or fixed; Calibrator Values: Selected radionuclide, calibration number, measured activity and display units (Bq/Ci); Counter Values: Wipe and lab test results
- Electrometer: Accuracy: Better than $\pm 2\%$; Linearity: Within $\pm 2\%$
- Nuclide Data: Setting Keys: 8 pre-set, 5 user selectable; Calibration # Key: Calibration # Keys for Over 200 nuclides; System Memory: Over 80 nuclides (w/cal number and half-life)
- Standard Source Data: System Memory: Co-57, Co-60, Ba-133, Cs-137, Ra-226 standard sources
- Molybdenum-99 Assay: Methods: CAPMAC[®] & canisters; Measured Values: Mo-99 elution, Tc-99m, Tc-99m/Mo-99 ratio
- PC Port: Interface: RS-232C and USB port; Compatibility: Standard nuclear

medicine management systems

- Printer Port: RS-232 & USB
- Power Requirements: 100-240 VAC (50/60 Hz) 100 MA
- Tests: Diagnostics: Full test of program, system memories
- Cable: Printer (Optional): 1.8m (6ft)

CRC[®]-25W Calibrator 5130-3216

Optional Accessories

CRC[®]-25 Interactive Remote Display5130-2224
Epson Roll Printer5430-0058
Epson Ticket Printer5430-0100
CRP-200 Dose Tickets & Labels.....7120-1199
Environmental Shield7300-2450
Well Detector Auxiliary Shield.....5420-2072
Moly Assay Liner7300-2004
Moly Assay Dipper.....7300-2005


CRC[®]-25R and 25W PC Series Communications Software

Fast and Easy Data Acquisition-Track, Record and Store Dose Calibrator Measurements on Your PC

CRC[®] PC Communications software will allow for faster and easier data acquisition and storage to your computer. Measurement data, including isotope name and activity, will be transmitted and stored on your PC via an RS232 interface port and the Dose-Link Software package. Ideal for maintaining regulatory compliance, research studies or use in production facilities.

The PC Communications software will create an interface between your CRC[®]-25R or 25W dose calibrator and your PC. The Dose Link program has four modes of operation:

- Acquire and Store Data - Each second the name and activity of the isotope selected on the dose calibrator console will be updated by the program. This data can be saved and exported to an Excel spreadsheet.
- Repetitive Acquisitions - Following user defined parameters of time intervals and number of measurements, activity and isotope data are acquired and saved. The data can then be printed or exported. Great for performing quarterly linearity tests (you don't even have to be there).
- Maximum Activity Acquisition - The activity and isotope are updated and displayed at time intervals defined by the user, when

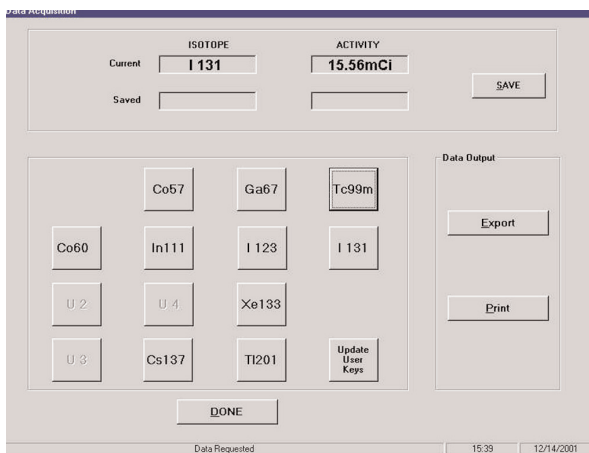

Data Acquisition Screen

data acquisition is stopped, the maximum activity and time will be saved and can be printed or exported.

The CRC[®] PC Communications software is easy to install, easy to use and almost as cost conscious as you are. Help your department maintain accurate record keeping without breaking the department budget.

25R/W PC Communications Software0960-0173